


CAUTION! Use only TTL version of NanoCore12 in U3 socket.

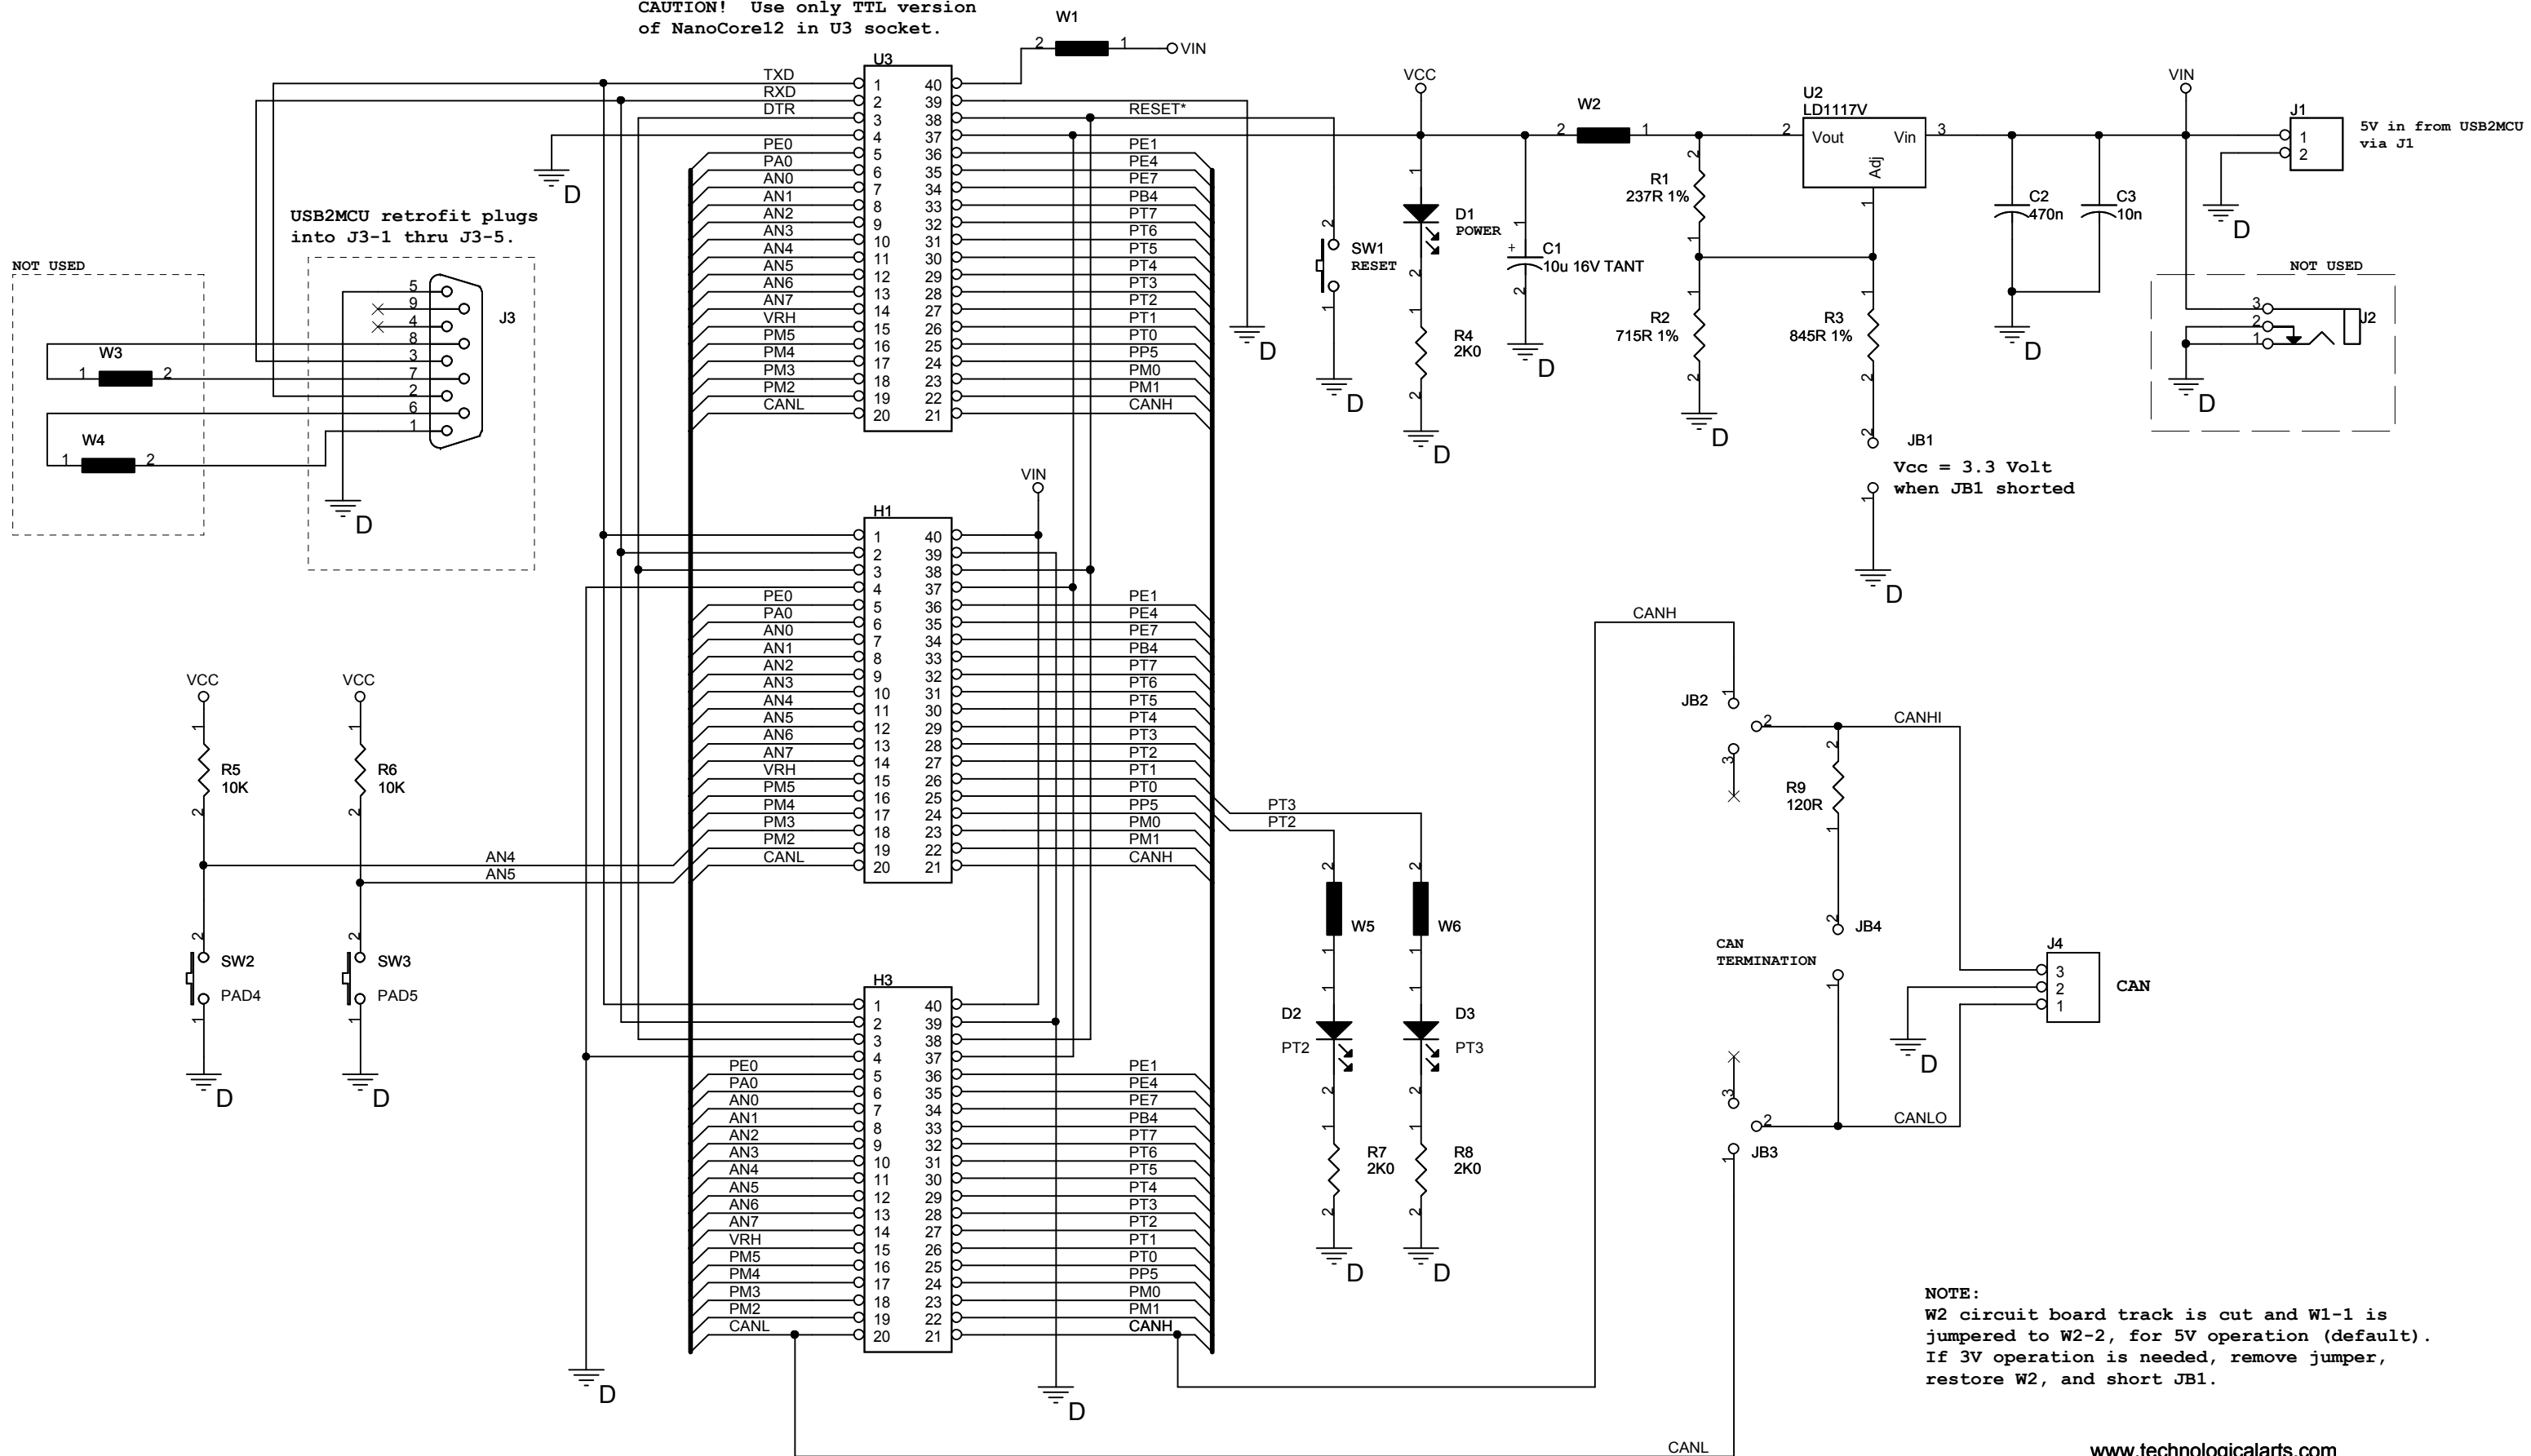

NOTE:  
W2 circuit board track is cut and W1-1 is jumpered to W2-2, for 5V operation (default).  
If 3V operation is needed, remove jumper, restore W2, and short J1.